

受 控

SPECIFICATION

1. SCOPE

This specification is applied to the piezo-element.


2. SPECIFICATION

(at 25°C)

- 2.1 Resonant Frequency : 1.3 ± 0.3 KHz
- 2.2 Resonant Resistace : 500 Ω max
- 2.3 Capacitance : 60000 pF ± 30% at 100Hz
- 2.4 Input Voltage : 30 Vp-p max
- 2.5 Operating Temperature : -20~+50°C
- 2.6 Storage Temperature : -20~+70°C

3. DIMENSION

: as per figure

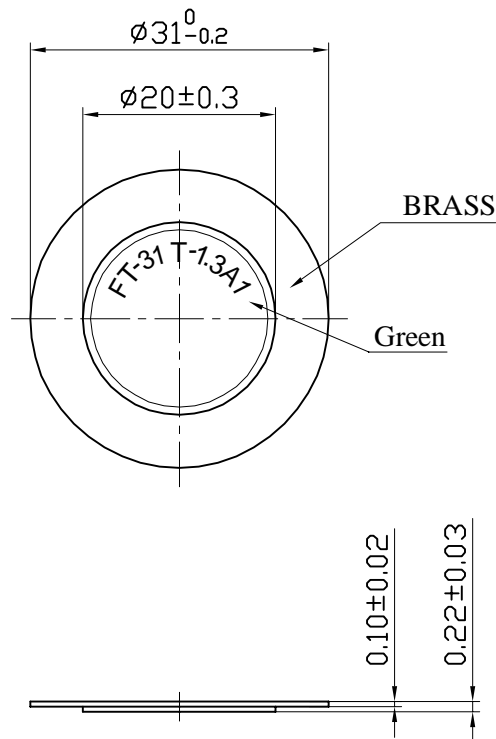

<p>TOLERANCES UNLESS NOTED OTHERWISE</p> <p>.X ±</p> <p>.XX ±</p> <p>.XXX ±</p> <p>90° FORMED +2°</p> <p>ANGLES -1°</p> <p>FIRST ANGLE PROJECTION</p>	DRAWN	汪逸	KEPO MODEL NO.	CUSTOMER		
	DESIGN		FT-31T-1.3A1-1926	QUARTZ-1		
	CHECKED					
	APPROVED	徐锦生	DWG NO.	CUSTOMER NO.		
	DATE	10.12.06	OEM1926			
	CONTRACT NO.			VER	1.1	SCALE
AGENCY APPROVAL			UNIT	mm	SHEET	
			KEPO CO.,LTD.		TEL:(+86)574-88370330 FAX:(+86)574-88370329	