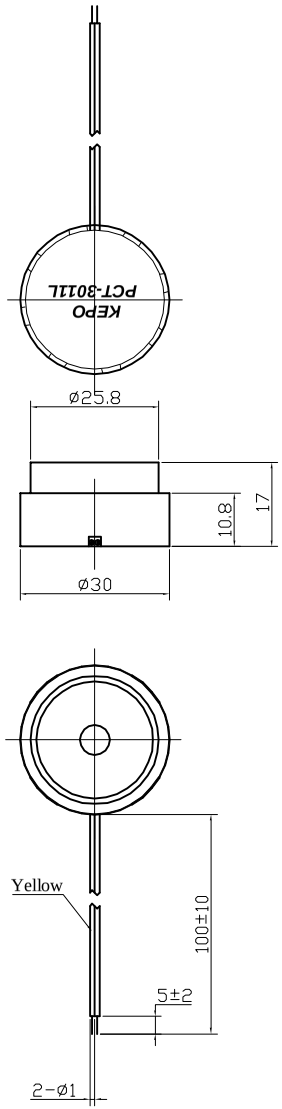

SPECIFICATION

1.Max. Rated Input Voltage .....200Vp-p Sine Wave
2.Min. Sound Pressure Level .....105±5dB at 30Vp-p Square Wave /3.3KHz/30cm
3.Rated Frequency Range .....3.3±0.5KHz
4.Max.Capacitance at 100Hz .....20000±30%uF
5.Shell Material/Color .....ABS/Ivory
6.Operating Temperature .....-20～+60℃
7.Store Temperature .....-30～+70℃
8.Weight 6.5g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2.° ANGLES -1.°
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	06.10.26

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Tweeter
PCT-3011L1

UNIT	DWG NO.	
mm	KP3.840.536.02	
SCALE	NOT TO SCALE	SHEET / VER 1.3