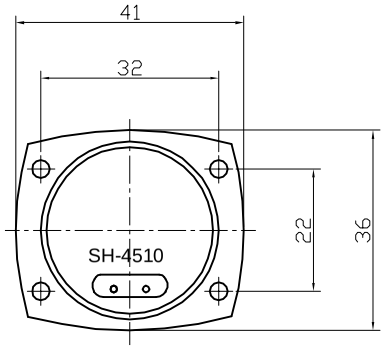

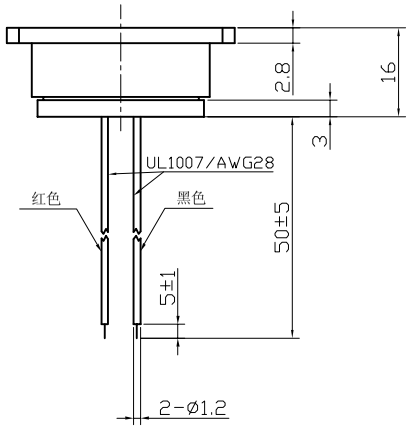

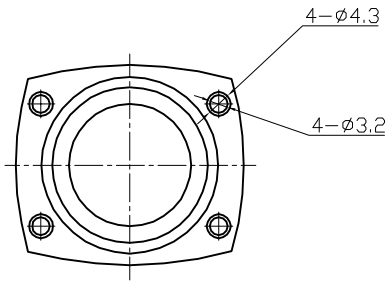

SPECIFICATION

1.Rated Voltage .....2.83Vrms Sine Wave
2.Max.Rated Input Voltage .....60Vrms Sine Wave
3.Rated Frequency Range.....2～5KHz
4.Min.Rated Sensitivity.....80±5dB at 2～5KHz/2.83Vrms Sine Wave/30cm
5.Capacitance At 100Hz .....25000pF±30%
6.Shell Material/Color .....ABS/Black
7.Operating Temperature .....-20～+60℃
8.Store Temperature .....-30～+70℃
9.Weight 10g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2° -1°
ANGLES
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	06.07.12

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Siren QUARTZ
SH-4510-2233

UNIT mm | DWG NO. OEM2233
SCALE NOT TO SCALE | SHEET | VER 1.0